



INT
STD
DEC


Arenalux® - Red Frost - Decorative Effect Diffuision®

Visible Light Transmittance	60%
transmission de la lumiere visible (FRA)	luce visibile trasmessa (ITA)
transmission de luz visible (SPA)	licht durchlass (GER)
Solar Transmittance	62%
energie solaire transmise (FRA)	energia solare trasmessa (ITA)
energia solar transmitida (SPA)	sonnenenergie durchlass (GER)
Solar Reflectance	14%
energie solaire réfléchie (FRA)	energia solare riflessa (ITA)
energia solar reflejada (SPA)	sonnenenergie reflektion (GER)
Solar Absorbance	24%
energie solaire absorbée (FRA)	energia solare assorbita (ITA)
energia solar absorbida (SPA)	sonnenenergie absorbtion (GER)
Winter U-Value	1,09
u-value facteur (FRA)	fattore-u (ITA)
u-value factor (SPA)	u-faktor (GER)
UV Rejected	99%
u.v. rejetés (FRA)	u.v. respinti (ITA)
u.v. repelidos (SPA)	u.v. reflektion (GER)
Glare Reduction	18%
riduction de l'éblouissement (FRA)	riduzione dell'abbagliamento (ITA)
reduccion de la intensidad de luz (SPA)	blendungsreduktion (GER)
Shading Coefficient	0,81
coefficient d'ombrage (FRA)	coefficiente d'ombreggiatura (ITA)
coefficiente de sombreado (SPA)	schattierungskoeffizient (GER)
Total Solar Energy Rejected - TSER	38%
total energie solaire rejetée (FRA)	energia solare totale respinta (ITA)
energía total rechazada (SPA)	gesamte reflektierte solarenergie (GER)
Solar Heat Gain Coefficient - SHGC	62%
facteur solaire (FRA)	fattore solare (ITA)
factor solar (SPA)	gesamtenergie durchlassgrad (GER)
Film Thickness (micron)	50
epaisseur (FRA)	spessore (ITA)
espesor (SPA)	dicke (GER)
Structure	2 ply
structure (FRA)	struttura (ITA)
estructura (SPA)	struktur (GER)
Peel Strength (pi)	NA
résistance au décollement (FRA)	resistenza al distacco (ITA)
resistencia al desprendimiento (SPA)	schale stärke (GER)
Tensile Strength (psi)	NA
résistance à la traction (FRA)	resistenza alla trazione (ITA)
fuera de tension (SPA)	zerreiβfestigkeit (GER)

ARENA 2-80 RED

Red Frost

2 Ply - Interior use

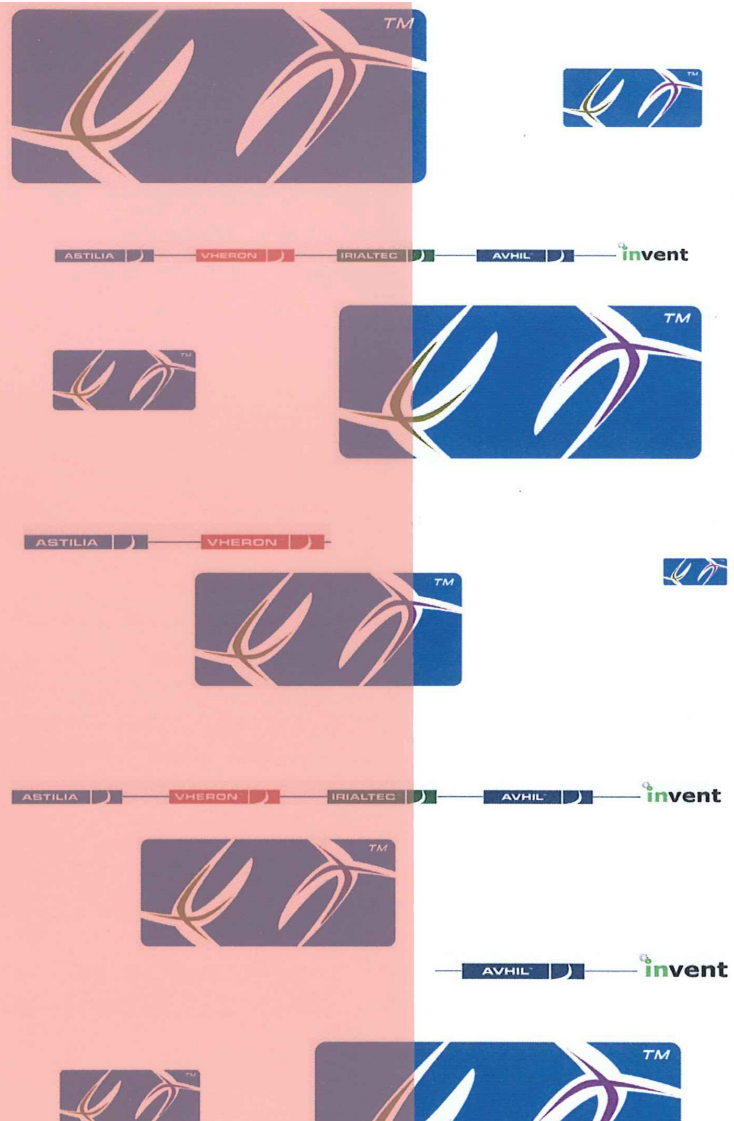

C O L O U R T E S T